


Machine d'assemblage  
Soudage par résistance  
Soudo brasage - Ultrasons - Induction

## PEDESTAL TYPE RESISTANCE SPOT WELDER

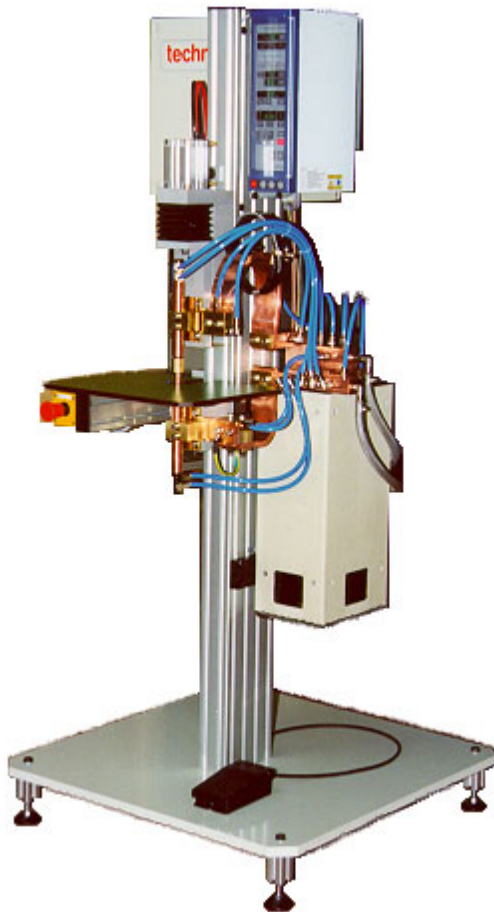

- Air operated welding head :

- \* TA10 force 10 daN
- \* TB18
- \* TC45
- \* TC70
- \* TD110
- \* TD175
- \* TE290
- \* TE460

Options :

- \* Welding force measuring device with load sensor
- \* Control of the electrode stroke movement through optical linear appliance

- Single phase transformer 50 Hz :

- 25 kVA
- 40 kVA
- 63 kVA
- 100 kVA
- 125 kVA

- Welding controller with :

- \* Constant current regulation
- \* Control of the current intensity

- Electrical cabinet with power thyristor contactors

- Foot switch operated

Remarks :

- Dual welding heads possible (1 head on the right / 1 head on the left)
- Welding head can be supplied with lower moving electrode

991018