


Machine d'assemblage
Soudage par résistance
Soudo brasage – Ultrasons – Induction
Laser

AUTOMATIC FEEDING DEVICE OF STRIP BRAZING MATERIAL



- Self-running device enabling the automatic feeding of a brazing strip between two pieces to be assembled.
- Especially well suited for raw copper parts where a direct welding is difficult to achieve.
- Standard strip width from 2 to 4 mm. Thickness from 0.06 up to 0.3 mm.
- Accurate adjustment of the fed brazing quantity.
- Control of strip feeding and control of its melting.
- Easy integration on every kind of existing welding machines.

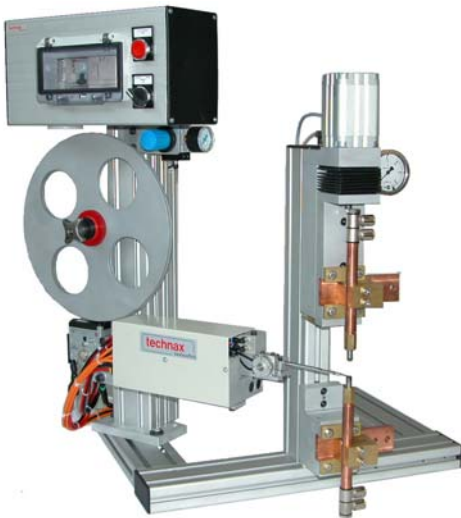

Example of an integration on a technax standard welding head

